




# “CD” SERIES - CD30

**PURPOSE BUILT FOR:**

**PRIME POWER, INDUSTRIAL, MOBILE EQUIPMENT  
MOTOR VEHICLES, CRITICAL APU's**

**MODEL CD30 - 30.0kW**

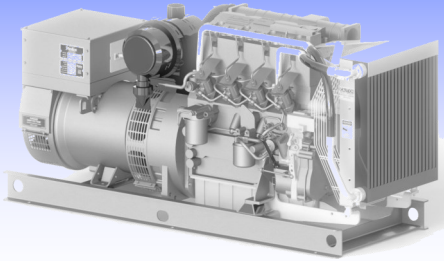

## SPECIFICATIONS

### **Robust AC Power Source**

**DUTY RATING:** Industrial, Continuous

**SIZE:** 59.4”L x 23.5”W x 28.2”H

**WEIGHT:** 1120 Lbs.

### **OUTPUT CURRENT:**

240/120VAC, 1 Phase, 60 Hz

240VAC, 3 Phase, 60 Hz

480VAC, 3 Phase, 60 Hz

208VAC, 3 Phase, 60 Hz

### **POWER RATING:**

30.0 kW Intermittent

27.0 kW Continuous

### **ENGINE:**

4 Cylinder Diesel

Liquid Cooled, 1800RPM

### **ENGINE SOUND LEVEL:**

88.5 dB(A) @ 1 Meter

74.5 dB(A) @ 7 Meters

### **A.C. ALTERNATOR TYPE:**

4-Pole, Electronic Regulated, 1800 RPM,

60Hz, Insulation Class “H”

## FEATURES & BENEFITS

- A factory engineered, proven, built and production tested power system by Stadco® a division of Stauffer Diesel Inc. Independent AC power source
- Suitable for either free-standing or compartment duty. Modular design - easier installation
- Each generator is designed to pass NFPA 2 Hour load test at continuous load
- Designed for Prime Power, Mobile Equipment, Motor Vehicles, Critical APU's
- Modular design - easier installation.
- Robust High Density, Welded Aluminum Heat Exchanger
- Stands up to the heat. Wide operating temperature range: 0°F to 122°F. (50°C)
- Easy Access to all routine Service Points
- Convenient connections to vehicle battery and diesel fuel tank
- Powered with Deutz Diesel 1800RPM Engine
- EPA Emissions Compliant with no exhaust after-treatment required.
- Safety Protection System continually monitors Engine Condition. Virtually eliminates catastrophic failures.
- Standard Digital Control System - Common Controller
- 4 Pole brushless alternator for extended service life
- Muffler Exhaust Kit included - Shipped Loose.
- Supported by a 2-Year or 2000 Hr. Limited Warranty and Money Back Guarantee see Stadco® policy #D25.

©2013 STADCO® PRODUCTS DIVISION

PO BOX 586 • 34 STAUFFER LANE • EPHRATA, PA 17522

PHONE: (717)738-2500 • FAX: (717)738-2550

EMAIL: gensales@staufferdiesel.com • Website: www.stadcogen.com

## **STANDARD DIGITAL CONTROL SYSTEM - #1779**



- Programmable Digital Control System (Remote mounted)
- Available with standard enclosure or optional flat panel
- Includes 10' Plug in cord w/weather-proof quick connectors.
- Metering for AC and DC electrical systems.
- Auto-crank and Preheat Capability are standard
- Automatic shutdowns and warnings.
- Auto-shutdown when power is fed from separate source.
- Refer to Bulletin #S160.13


## **OPTIONAL ACCESSORIES**

- Remote Start/Stop Panel - Kit #1780 (in cab).
- Flat Panel Control System - Kit #1791
- Digital Control System w/AC Metering - Kit #1790.
- 12V Engine Preheat System - Installed
- Battery Box for BCI Group 27/31 (Shipped Loose)
- Second 12V Heater Plug for Intake Manifold (Alaska)
- 10 Ft. Extension Cord for Control Panel - Kit #1801.
- 20 Ft. Extension Cord for Control Panel - Kit #1802.
- Uprated Starter Motor 12V 3kW. (Alaska)
- Engine Heater, 120V, 300W Immersion Heater Mounted in Oil Pan, Plug into Shore Power. (Alaska)
- Silicone Engine Mounts. (Alaska)
- Exhaust Muffler Kit #1737 w/S.S. Flex Tubing (CD20 and CD30 Only)

## **STADCO SUPPORT SERVICES**

- Toll free Stadco Tech service hotline: 1-800-377-2120
- Maintenance and service support information posted on Stadco website.
- Routine service provided by selling dealer or Stadco.
- Stadco services: shop and on-site road service. Plus comprehensive rebuilding services.

## **GENERAL DIMENSIONS**

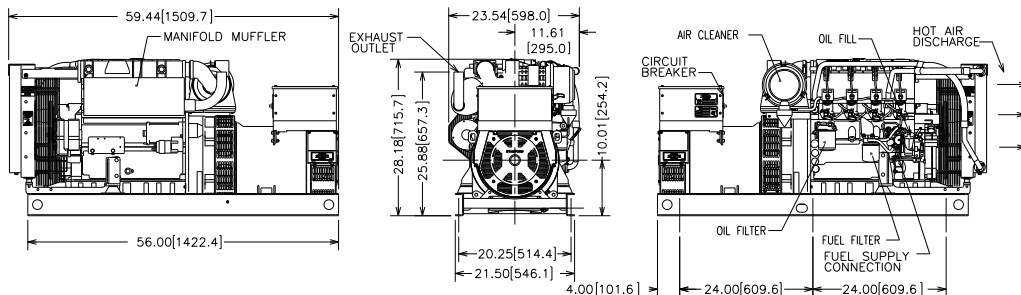

**CD Series Generators available in sizes ranging from 10.0kW to 40.0kW**

**For Complete Specifications See Bulletin #S153**

**©2013 STADCO® PRODUCTS DIVISION**

PO BOX 586 • 34 STAUFFER LANE • EPHRATA, PA 17522

PHONE: (717)738-2500 • FAX: (717)738-2550

EMAIL: gensales@staufferdiesel.com • Website: www.stadcogen.com